

Current-induced vibrations of submerged floating tunnels

Katta Venkataramana, Susumu Yoshihara, Shozo Toyoda and Yorikazu Aikou
Department of Ocean Civil Engineering, Kagoshima University

Introduction: Japan is surrounded by sea on all sides and consists of four main islands and hundreds of smaller islands. The main islands are now well connected by bridges over the sea or tunnels on the bottom of the sea. But as the separation length as well as the depth increase, these types of connections are becoming extremely difficult for construction both from technical and economical viewpoints. As the ocean development grows, it has become necessary to study alternate forms of channel-crossing concepts. In this regard, the concept of the underwater tunnel or the so-called submerged floating tunnel is attracting wide interest in the engineering and academic circles and it may become a major part of the infrastructure of the 21st century.

When these tunnels are located in a region where current flow exists, they experience horizontal motion due to fluid drag force and vertical motion due to fluid lift force (vortex-induced motion). In the present research, experiments were carried out on tunnel models with different natural frequencies and their responses along horizontal and vertical directions due to the current flow were recorded and analyzed.

Experimental setup: PVC cylindrical pipes were used as experimental models. They were held in position by means of springs as shown in Fig. 1. Tests were carried out for various values of the ratio of horizontal and vertical stiffnesses. The natural periods of the models are tabulated in Table 1. Experiments were carried out for current velocities ranging from 0.1m/s to 1.2m/s at 0.1m/s intervals. Photo 1 shows the photograph of a model. Photo 2 is a shot of the model vibrating due to current loading. The responses were recorded by video camera and then using video tracker, the traces of the responses were divided into horizontal and vertical components. Photo 3 shows the traces of responses of 4 points marked on the acryl plate attached to the side of the model. The average of these 4 traces gives the trace of the center of gravity.

Results and discussions: The examples of the time histories of horizontal and vertical components of the traces are shown in Fig.2. The horizontal displacement increases with the increase in current velocity as expected due to the increase in fluid drag force. The variation in the vertical displacement is more complex and is influenced by eddies and other forms of turbulence. Fig.4 shows the power spectrum of vertical displacements. When there is not much interaction between the model and its wake, the eddy shedding frequency is directly proportional to the current velocity. In situations where the model is mostly stationary and the flow is laminar, regular number of vortices are generated on the downstream side of the model. However when the model is susceptible to movement or when the flow is turbulent, vortices are generated in a random fashion. For non-stationary models, these vortices influence the motion of the structure thus contributing a feed-back effect. This effect is particularly severe when the frequency of the eddy-shedding frequency is closer to the natural frequency of the structure.

Also for larger current velocities, the flow becomes chaotic around the models with irregular eddy-shedding and the models show patterns of severe random vibration.

Fig.3 shows the rms displacements of the models plotted against the current velocities. Each value corresponds to the rms value of the displacement data for about 68-second duration. The horizontal displacement grows with the increase in current velocity due to larger fluid drag forces. The values for the vertical component show a peak for certain values of current velocities which is due to the proximity of the eddy-shedding frequency to the natural frequency of the model. Also, as the model 2 is stiffer in the horizontal direction, the horizontal responses are smaller than that of model 1.

Acknowledgements: The experiments were carried out at the circulating water channel of the Faculty of Fisheries of Kagoshima University. Mr M. Hayashi, Mr S. Morikawa and Mr T. Kinoshita, undergraduate students, helped in carrying out the experiments.

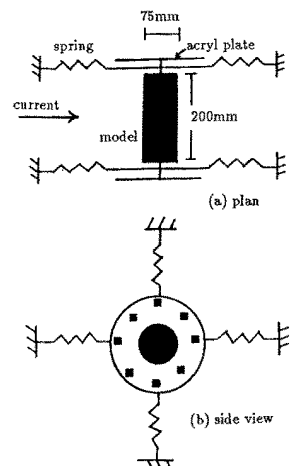


Fig.1 Schematic diagram of model

Table 1: stiffness ratios and natural periods

Model	Stiffness ratio (k_x / k_y)	Natural period (sec)	
		horizontal	vertical
Model 1	1	0.838	0.838
Model 2	2	0.665	0.741

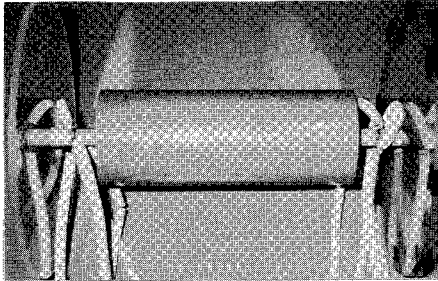


Photo 1 Photo of a model



Photo 2 Model inside the water channel

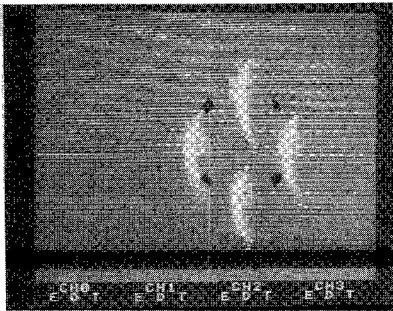


Photo 3 Traces of response displacements displayed on a computer monitor

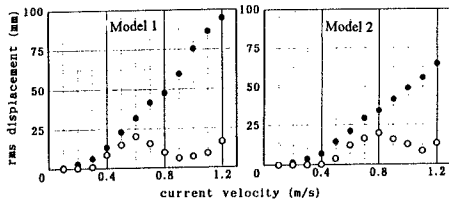


Fig. 3 rms response displacements
(● hori. component, ○ vert. component)

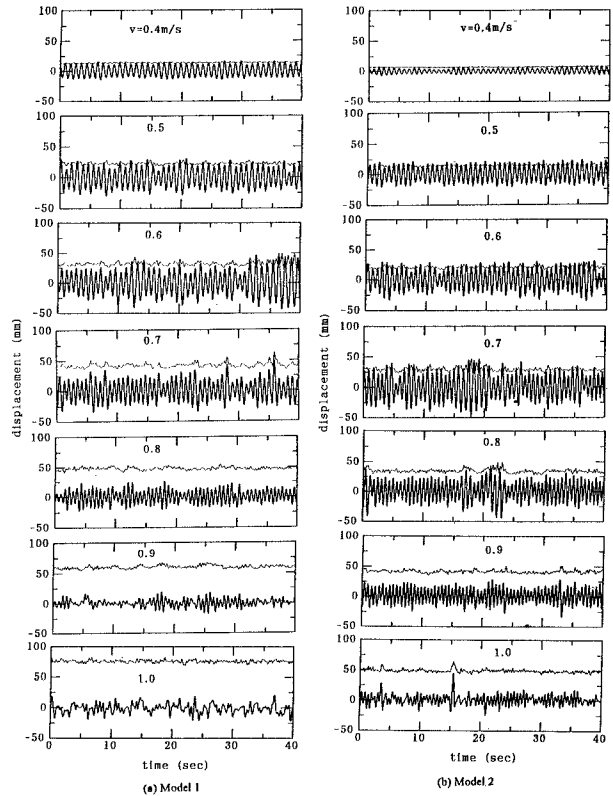


Fig. 2 Examples of time histories of response displacements
(—— hori. component ; ——— vert. component)

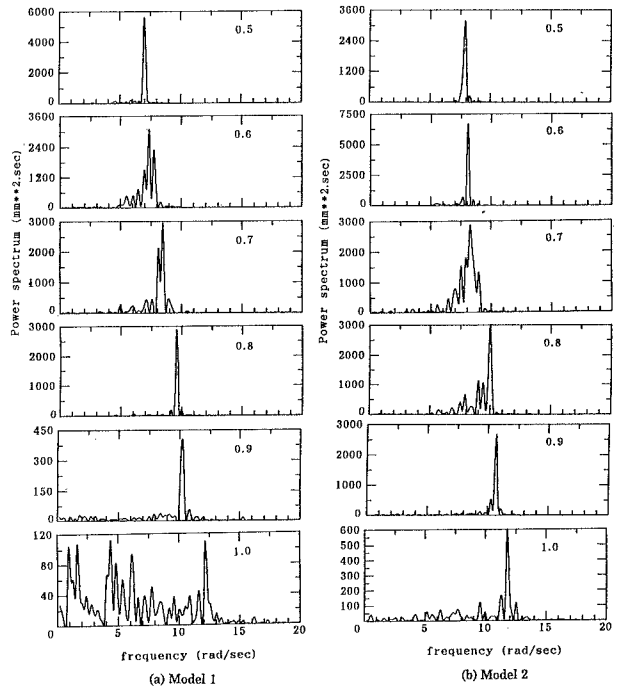


Fig. 4 Power spectrum of vertical displacements