

REFERENCES

(1)Tatsuoka, F., and Fukushima, S., "Modeling on Stress-Strain Relationship of Randomly Oscilated Sands", Seisan Kenkyu, Vol. 30, No. 8, 1978, 26-29. (2)Novak, M., Nogami, T., and Aboul-Ella, F., "Dynamic Soil Reactions for Plane Strain Case", ASCE, Vol. 104, EM4, 1978, 953-959. (3)Giberson, M. F. "Two Nonlinear Beams with definitions of ductility", ASCE, Vol. 95, ST2, 1969, 137-157. (4)Saito, M., and Sozen, M. A., "Simple and Complex Models for Nonlinear Seismic Response of Reinforced Concrete Structures", Structural Research Series No. 465, Civil Engineering Studies, University of Illinois, Urbana, Ill., Aug, 1979. (5)Shimabuku, J., and Takemiya, H., "Nonlinear Analysis of RC Bridge Pier with Soil Effect", Proceedings of the 52nd Annual Conference of the Japan Society of Civil Engineers, Tokyo, Japan, 1997, 736-737. (6)Park, J., and Ang, A. H. -S., "Mechanistic Seismic Damage Model for Reinforced Concrete", ASCE, Vol. 111, ST4, 1985, 722-739. (7)Powell, G.H., and Allahabadi, R., "Seismic Damage Prediction by Deterministic Methods: Concepts and Procedures", Earthquake Engineering and Structural Dynamics, Vol. 16, 1988, 719-734.

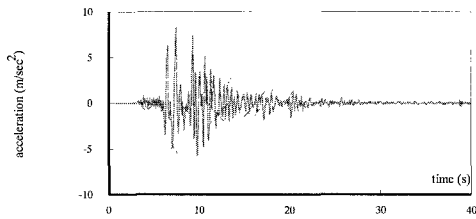


Fig. 2. Hyogo-ken Nanbu Earthquake, JMA-NS

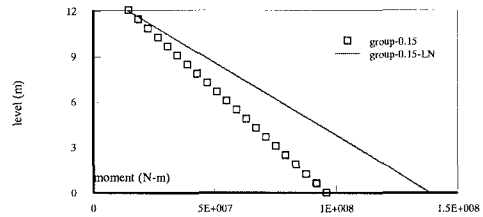


Fig. 3. Superstructure maximum moments

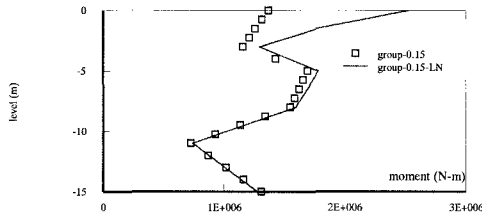


Fig. 4. Maximum moments at pile

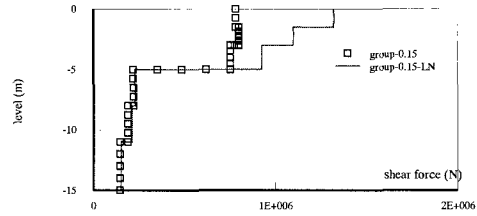


Fig. 5. Maximum shear forces at pile

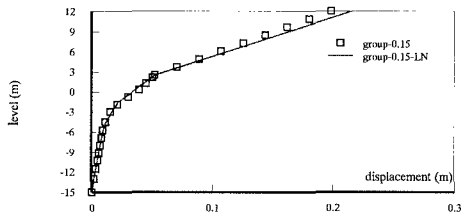


Fig. 6. Maximum displacements

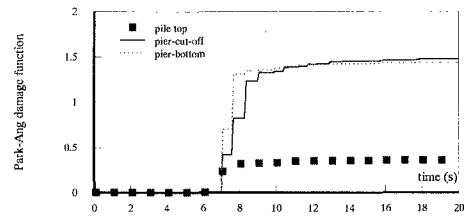


Fig. 7. DPA of group-0.15

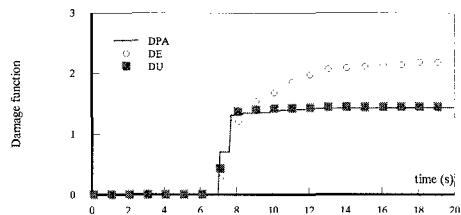


Fig. 8. DPA, DE and DU at bottom of pier

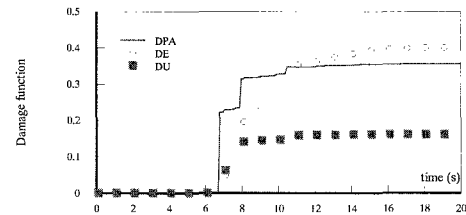


Fig. 9. DPA, DE, and DU at pile top

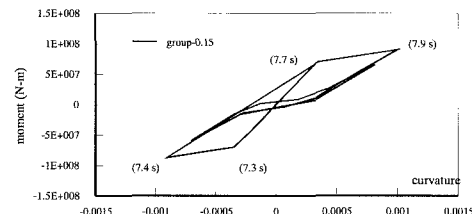


Fig. 10. Hysteresis at bottom of pier until 10 s.

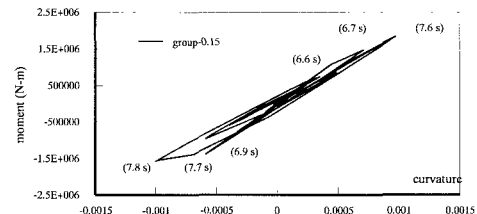


Fig. 11. Hysteresis at pile top until 10 s.