

投稿論文 (英文)
PAPERS

LESSONS LEARNED FROM RECONSTRUCTION FOLLOWING A DISASTER: ENHANCEMENT OF REGIONAL SEISMIC SAFETY ATTAINED AFTER THE 1976 TANGSHAN, CHINA EARTHQUAKE

Keishi SHIONO¹, Hitomi MURAKAMI², Shigeyuki OKADA³ and Yutaka OHTA⁴

¹Member of JSCE, Dr. Eng., Associate Professor, Department of Civil Engineering, Nagaoka College of Technology (888 Nishi-Katakai-Machi, Nagaoka, Niigata 940, Japan)

²Dr. Eng., Research Associate, Department of Architectural Engineering, Hokkaido University (Sapporo, Hokkaido 060, Japan)

³Dr. Eng., Associate Professor, Department of Architectural Engineering, Hokkaido University

⁴Dr. Sci., Professor, Earthquake Research Institute, University of Tokyo (Bunkyo-Ku, Tokyo 113, Japan)

Comparing an estimated death toll in the reconstructed environment of Tangshan in 1991 with the actual deaths in the 1976 earthquake, we evaluated the enhancements in seismic safety attained during the reconstruction. It was found that while the most severely affected area was remarkably improved, the less severely affected area was not rebuilt to the standards of the most severely affected area. The increased safety of the most severely affected area can be attributed to the reinforced concrete elements of the buildings. The hazardous situation in the less severely affected area is due to the collapsible nature of the unreinforced masonry construction.

Key Words : earthquake disaster, safety assessment, reconstruction, Tangshan earthquake, China

1. INTRODUCTION

Enhancements in regional safety from earthquakes often take place in the reconstruction following a devastating disaster. There were many cases where an earthquake flattened seismically vulnerable buildings and, subsequently, replaced those with sufficiently strong ones.

In spite of this general recognition, virtually no attempts to seriously examine the tendency in an organized, quantitative way have been carried out. Reconstruction of seismically affected areas was often discussed from the view point of urban and land-use planning, but was not examined in a careful manner from the view point of disaster mitigation.

In this study, we evaluated the regional seismic safety of the affected area of the 1976 Tangshan earthquake before and after the earthquake and carried out a comparison. The purpose of this case study was to elucidate the nature of the safety enhancements that were attained during the reconstruction.

We used the number of deaths, or its reciprocal, as the index to indicate the relative seismic safety of the area. We evaluated an environment having a

large death toll, either actual or estimated, unsafe and that having a small toll safe.

To evaluate the seismic safety of the reconstructed area, we used a hypothetical recurrence of the 1976 earthquake as the seismic input. We compared the estimated deaths in the reconstructed environment in 1991 with the actual death toll of the 1976 earthquake. We included the change in the construction type of dwelling structures, as well as the population.

This idea can be compared to a shake table test having two different test pieces and the identical table movement. The two test pieces were the pre-event and the post-reconstruction environment of the affected area. The table movement was the ground shaking of the Tangshan earthquake. While the pre-event environment was actually shaken by the 1976 earthquake, the post-reconstruction environment had to be virtually shaken by a hypothetical earthquake having the identical ground shaking with the 1976 earthquake. As the seismic input to the post-reconstruction environment, we used an isoseismal map of the 1976 earthquake.

Actual seismicity of the case study area was not examined, since we did not try to carry out damage assessment for the "next" earthquake. We rather

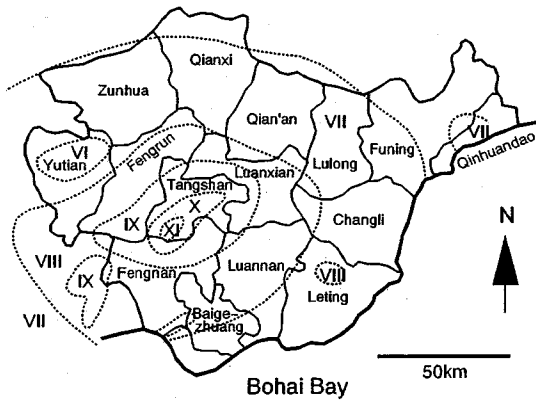


Fig. 1 Map of the case study area (Isoseismals after Yang, 1985²).

focused our attention on the change in regional seismic safety in the consequences of devastation by the earthquake. Our discussion in this paper, in other words, excluded time and space related nature of disaster agent, or local earthquake activity, which is still not available, in most part of the world, as information applicable to practical decision making in disaster management.

An earlier version of this paper¹ was presented at the Second International Conference on Continental Earthquakes, October 7-10, 1992, Beijing, China.

2. INTERPRETATION OF DAMAGE DATA OF THE TANGSHAN EARTHQUAKE

(1) Study Area

As the case study area, we selected a region consisting of the city of Tangshan and the Tangshan municipal district at the time of the disaster (Fig. 1). The municipal district included the city of Qinquandao, 12 counties, and one agricultural district. In 1975, the case study area had a geographical area of 16,500 km² and a population of seven million, which has been increased by one million by the time of our investigation in 1991. In the 1976 earthquake, 205 thousand people were killed within this area, which corresponds approximately 85% of the total deaths in the disaster.

Among the 15 administrative units in the area, the city of Tangshan, which is the urban center of the region, was the most severely affected by the earthquake. The other 14 units, which were essentially an agricultural area encompassing the city, were less severely affected compared with the city. We estimated the number of deaths for the following two parts, respectively:

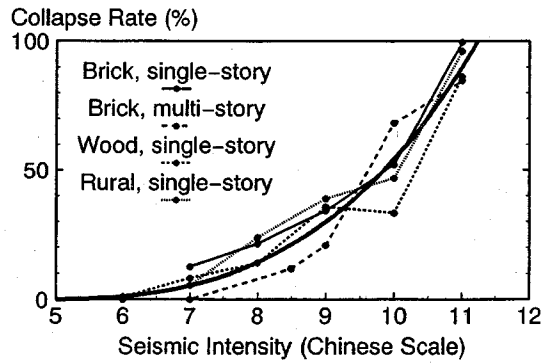


Fig. 2 Collapse rate functions of the buildings affected in the 1976 Tangshan earthquake.

- a) The most severely affected part (City of Tangshan)
- b) Less severely affected part (Surrounding rural area).

(2) Building Vulnerability

We collected published data on the building damage in the 1976 event^{3, 4} to enumerate collapse rate functions for the dominant construction types (Fig. 2). We defined "collapse" as damage in which a building is affected "beyond repair" and gave the collapse rate function as the relationship between seismic intensity and collapse rate.

We came up with a general expression of collapse rate function as follows:

$$C(I) = \frac{100}{(I_{100} - I_0)^n} (I - I_0)^n \quad (1)$$

where

C: Collapse rate (%)

I: Seismic intensity (Chinese scale)

I_0 : Seismic intensity defined as $C=0$ at

$$I \leq I_0$$

I_{100} : Seismic intensity defined as $C=100$ at

$$I \geq I_{100}$$

n: Coefficient that accounts for the non-proportional characteristics between seismic intensity and collapse rate.

The equation has three arbitrary quantities, I_0 , I_{100} and n, which we determined from the damage statistics applying the method of simplex optimization. We derived a set of coefficients: $I_0=4.39$, $I_{100}=11.2$, and $n=3.1$ to represent the relationships shown in Fig. 2. Since the difference in collapse rate among construction types was small, we derived a single relationship. Shiono⁵ described the details of this procedure in a previous paper.

Table 1 Distribution of the Death in the 1976 Tangshan Earthquake (Wang et al., 1986⁷⁾)

Area	Deaths
City of Tangshan	135,919
Surrounding Rural Area	69,065
Total	204,984

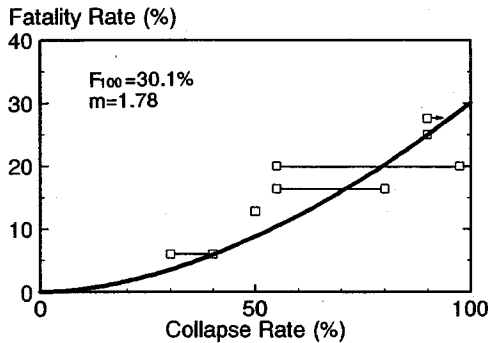


Fig. 3 Fatality rate function. Pairs of squares connected with horizontal bars show the range of collapse rate for an area in which a fatality rate was indicated.

(3) Fatality Rate Function

Referring to several casualty data collected from earthquake disasters worldwide⁹⁾, we gave a general expression of the fatality rate function as seen in Eq. (2). We defined the fatality rate as the percentage of fatalities among the total population of an area and determined the fatality rate function as the relationship between collapse and fatality rates.

$$F(C) = F_{100} C^m \quad (2)$$

where

- F: Fatality rate (%)
- C: Collapse rate of buildings (%)
- F_{100} : Fatality rate at $C=100$
- m: Coefficient that accounts for the non-proportional characteristics between collapse and fatality rates.

The distribution of the deaths in the 1976 earthquake shown in **Table 1** came from a report by Wang et al.⁷⁾

Using the method of simplex optimization, we determined the arbitrary quantities in Eq. (2) with a condition that the equation derives the best approximation to the above distribution. Shiono⁵⁾ described the details of this procedure in one of his previous papers. We determined the optimum coefficients as follows:

$$F_{100} = 30.1 \\ m = 1.78$$

In **Fig. 3**, in addition to the fatality rate function, we, using pairs of squares connected with horizontal bars, showed fragmental data of the relationship between seismic intensity and fatality rate. We collected those data from publications on the 1976 earthquake. The data are consistent with the fatality rate function that we derived on the basis of the spatial distribution of the deaths.

3. ESTIMATION OF FATALITIES IN THE RECONSTRUCTED ENVIRONMENT

(1) Method

To estimate a death toll, we used an equation as follows:

$$D = \int_0^{2\pi} \int_0^{\infty} [\Sigma(S_c \rho d_c (f_c(I)))] dr d\theta \quad (3)$$

where

- D: Total deaths
- S: Rate of population dwelling in each construction type
- ρ : Population density ($\rho = \rho(r, \theta)$)
- d: Fatality rate (Deaths/Population)
- f: Collapse rate of buildings
- c: Suffix to indicate construction type
- I: Seismic intensity ($I = I(r, \theta)$)
- r: Distance
- θ : Azimuth.

We gave regional characteristics in terms of the distribution of population and the construction types of local buildings. Referring construction type, we gave collapse and fatality rates, which eventually affect a death toll. We have already confirmed the accuracy of this procedure^{9), 10)}.

(2) Building Vulnerability

a) The Most Severely Affected Area (City of Tangshan)

One of the most significant aspects during the reconstruction after the earthquake was the change in the dwelling type in the most severely affected area. Single-story houses, which were mainly of unreinforced masonry and wood frame construction having masonry infill walls, were largely replaced with four- to six-story apartment buildings.

Construction types of the multi-story residential buildings can be seen in **Table 2**, and their wall configurations are shown in **Fig. 4**. Confined masonry construction has earthquake resistant elements of reinforced concrete beams and columns in brick walls. Its seismic capacity obviously

Table 2 Construction Types of Apartment Buildings Built during the Reconstruction of Tangshan

Construction Type	Relative Number of Buildings
Confined Masonry Load-bearing brick walls are reinforced with RC columns and lintels.	25%
Composite Outer walls are composed of brick walls, and inner walls are composed of RC panels. Both outer and inner walls are load-bearing components.	50%
RC Panel Both outer and inner walls are composed of RC panels and are load-bearing components.	25%

Table 3 Comparison of Building Types

Existing in Tangshan	Classification in an SSB publication
Confined Masonry	Intermediate between Brick Masonry and Multi-Story RC Buildings without Seismic Design
Composite	Multi-Story RC Buildings without Seismic Design
RC Panel	Multi-Story RC Buildings with Seismic Design

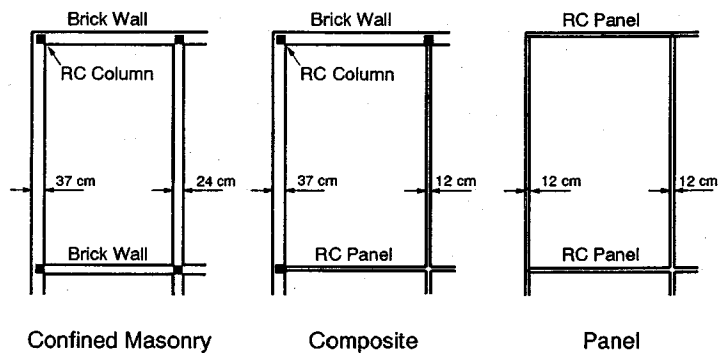


Fig. 4 Wall configurations of the apartment buildings employed in the reconstruction from the Tangshan earthquake.

exceeds that of unreinforced masonry construction, but falls below that of composite construction. The composite construction, which has interior walls of reinforced concrete panel, seems to perform better than the confined masonry against ground shaking. However, while reinforced concrete panel buildings can be regarded as an earthquake proofed system, the composite buildings were not built to the standards of the panel system.

We gave a collapse rate function for each of the three construction types, referring to the assessment done by State Seismological Bureau of China⁸⁾. The functions are shown in Fig. 5 with the SSB evaluation. Since the assessment of damage rate by SSB was given only in the range of seismic intensity between six and nine, we extrapolated the assessment using the general expression of the collapse rate function given in Eq. (1).

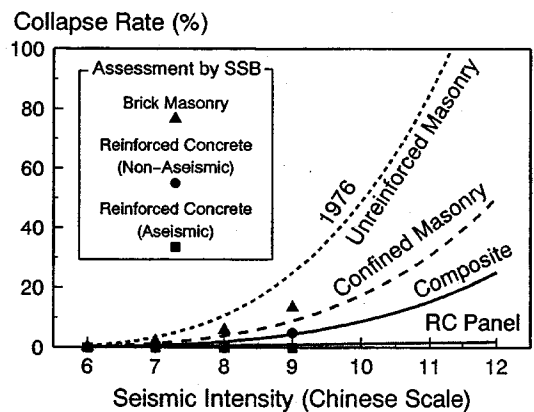


Fig. 5 Collapse rate functions for the apartment buildings in the reconstructed city of Tangshan.

Table 4 Estimated Deaths and Their Comparison with the Data of the 1976 Tangshan Earthquake

	Deaths (Fatality Rate)	
	Data (1976)	Estimate (After Reconstruction)
City of Tangshan	136,000 (11.4%)	8,000 (0.5%)
Surrounding Rural Area	69,000 (1.1%)	21,000 (0.3%)
Total	205,000 (2.8%)	29,000 (0.4%)

Table 3 shows a comparison between the existing construction types in Tangshan and those employed in the SSB publication for a general classification.

To estimate the relative number of apartment buildings by construction type, we carried out a small field investigation in July 1991¹¹). We visited 21 residential quarters to inspect the wall material, both the exterior and interior, distinguishing brick from reinforced concrete. The results are shown in the right column of **Table 2**. We estimated the population in each construction type, which we needed in the calculation of deaths, assuming it proportional to the relative number of buildings by construction type (see Eq. (3)). In the investigation, we also confirmed that the size of residential buildings, or the number of living units in a building, is essentially the same with no distinction of construction type. This observation was a good evidence to support the above assumption.

b) Less Severely Affected Area (Surrounding Rural Area)

In the surrounding rural area, unreinforced brick masonry was employed even during the reconstruction. In addition, in the usual renewal of residential buildings these days, unreinforced masonry construction is still being used. According to the SSB assessment⁸), the present brick buildings are considerably stronger than those existing at the time of the disaster. Two collapse rate functions for pre- and post-1976 brick buildings are shown in **Fig. 6**.

A plausible collapse rate function that assesses the vulnerability of the existing buildings in the reconstructed environment should be given between these two functions. To simplify our discussion in this paper, however, we used the lower assessment proposed by SSB, which accordingly implies a low estimate of fatality.

(3) Estimated Fatalities

Applying our assessment model, of which simplified expression is shown as Eq. (3), we estimated the fatalities in a hypothetical recurrence of the 1976 earthquake (**Table 4**). The collapse rate functions shown in **Figs. 4** and **5** were used in this

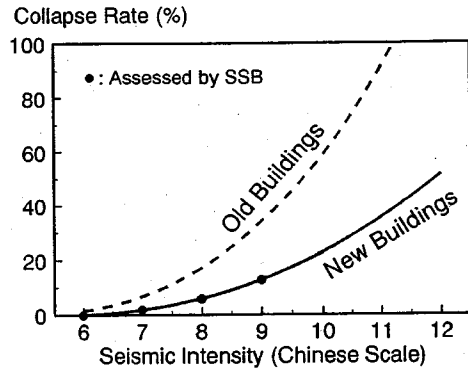


Fig. 6 Collapse rate functions of brick houses in the surrounding rural area.

estimation. Coefficients to determine those collapse rate functions were: $I_0=4.3$, $I_{100}=11.2$, and $n=3.1$ for unreinforced masonry, $I_0=4.1$, $I_{100}=13.7$, and $n=3.6$ for confined masonry, $I_0=4.1$, $I_{100}=15.7$, and $n=3.6$ for composite, and $I_0=4.1$, $I_{100}=34.6$, and $n=3.6$ for reinforced concrete panel. Seismic intensities higher than 12, such as 13.7, 15.7, and 34.6 are notional, which we employed for the sake of convenience in calculation. We also used the fatality rate function, Eq. (2) with $F_{100}=30.1$ and $m=1.78$, that was derived from the fatality data of the 1976 earthquake.

We used a fatality rate function that we derived from the data of fatalities attributed to the collapse of buildings having masonry walls. Therefore, our assessment for the city of Tangshan may have resulted in an over-estimate. Buildings in the present city of Tangshan have large structural elements, including reinforced concrete columns, beams, and panels. This means a longer survival time for those trapped in the collapsed buildings and, consequently, a better chance of live recovery¹²).

4. DISCUSSION

Regional seismic safety of the city of Tangshan, which the 1976 Tangshan earthquake affected most

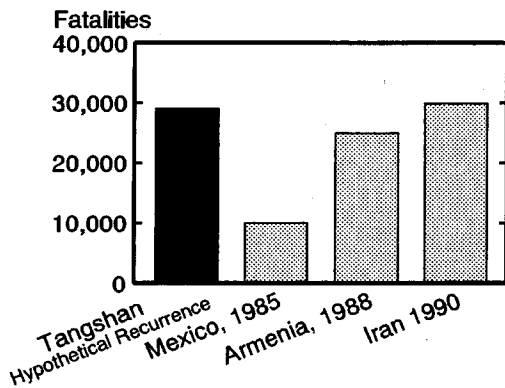


Fig. 7 Comparison of death tolls among recent "first-class" earthquake disasters worldwide.

severely, was remarkably improved during the reconstruction. The death toll estimated in the reconstructed environment for a hypothetical recurrence of the 1976 earthquake was almost 1/20 as small as the actual human loss in the 1976 disaster. Since we used a fatality rate function that was expected to provide a higher estimate, the estimate can be reduced even further.

In the surrounding rural area, in contrast, improvements in regional safety were carried out to a sizable extent, but did not reach the level of the city of Tangshan. Deaths in the reconstructed environment were estimated to be twenty thousand, while the actual death toll of the corresponding area in the 1976 earthquake was seventy thousand. Since we used a collapse rate function that conceivably gave a lower estimate, the estimate can be considerably increased.

The total number of estimated deaths in the entire case study area was still in the order of several tens of thousands, although the toll was expected to decrease to less than one-seventh. The estimated death toll was comparable with those of the recent major disasters including the 1985 Michoacan, Mexico earthquake, the 1988 Armenia earthquake, and the 1990 Manjil, Iran earthquake, where death tolls of ten thousand, twenty-five thousand, and thirty-five thousand were reported, respectively (Fig. 7). The affected area of the 1976 earthquake could suffer a "first-class" disaster, despite the regional safety enhancements that actually took place.

From the viewpoint of regional planning for safety development, enhancements in the seismic safety in Tangshan is characterized as a case achieved at a "point" rather than an "area." Only the earthquake safety in the most severely affected area, or at a point, was remarkably upgraded during the

reconstruction, while that in the less affected area, which was located very close to the point, was less than sufficient. The remarkable enhancement in seismic safety successfully attained at the point did not spread over the area around the point.

From a building quality point of view, seismic vulnerability of unreinforced masonry construction, as well as its lethal nature, is a significant issue warranting a discussion. We pointed out that the hazardous environment still existing in the area is attributed to buildings of such a type. Structural quality of unreinforced masonry buildings has been considerably improved these days, but is still and essentially inferior to that of buildings constructed with attention given to earthquake safety, including confined masonry and reinforced concrete buildings.

5. CONCLUSIONS

By assessing the improvements in earthquake safety attained in the reconstruction following the 1976 Tangshan earthquake, we discussed the nature of the safety enhancements for the city of Tangshan and its vicinity. We compared the estimated death toll in the reconstructed environment with the actual deaths in the 1976 disaster. We calculated the deaths using a hypothetical recurrence of the 1976 earthquake as the seismic input.

It was found that the city of Tangshan, which was damaged the most in the affected area, was remarkably improved regarding safety against earthquakes, but the surrounding rural area, which was less severely damaged, was not rebuilt to the standards of the city. The increased safety of the city can be attributed to the seismic-resistant elements of the apartment buildings including reinforced concrete columns, beams and wall-panels. The hazardous environment still existing in the surrounding area is due to the unreinforced masonry construction, of which earthquake capacity was gradually upgraded after the disaster, but is essentially inferior to that of the buildings constructed within the city.

ACKNOWLEDGMENT: The authors like to thank many Chinese researchers at Institute of Engineering Mechanics and Center for Analysis and Prediction, State Seismological Bureau of China for their valuable assistance and criticisms. This study was supported in part by grants from the Japanese Ministry of Education (Project Numbers 02044043, Y. Ohta, Principal investigator, and 03832036, K. Shiono, Principal investigator).

REFERENCES

- 1) Shiono, K.: Evaluation of earthquake safety of a reconstructed area: Case study of the 1976 Tangshan, China earthquake, *Continental Earthquakes, Selected Papers on the Second International Conference on Continental Earthquakes*, IASPEI Publication Series for IDNDR, Volume No. 3, Seismological Press, Beijing, China, pp. 528-535, 1993.
- 2) Yang, L.: Distribution of seismic intensity of the Tangshan earthquake, *Damage of the Great Tangshan Earthquake*, Seismological Press, Beijing, China, Vol. 1, pp. 124-131, 1986 (in Chinese).
- 3) Wu, T. and Y. Yang: Damage statistics of multi-story brick buildings, *Damage of the Great Tangshan Earthquake*, Seismological Press, Beijing, China, Vol. 2, pp. 6-18, 1986 (in Chinese).
- 4) Yang, D. and H. Di: Earthquake damage of urban and rural single-story buildings in Tangshan, *Damage of the Great Tangshan Earthquake*, Seismological Press, Beijing, China, Vol. 2, pp. 186-200, 1986 (in Chinese).
- 5) Shiono, K.: Interpretation of published data of the 1976 Tangshan, China earthquake for the determination of a fatality rate function, *Journal of Engineering Mechanics and Earthquake Engineering*, Japan Society of Civil Engineers, No. 507/1-30 (Vol. 11, No.4), pp. 25-33 (pp. 155s-163s), 1995.
- 6) Coburn, A. W., A. Pomonis, and S. Sakai: Assessing strategies to reduce fatalities in earthquakes, *Proceedings of International Workshop on Earthquake Injury Epidemiology for Mitigation and Response*, July 10-12, 1989, The Johns Hopkins University, Baltimore, Maryland, U. S. A., pp. P107-P132, 1989.
- 7) Wang, Z. et al.: *The Moment and the Following Ten Years - Everything about the Tangshan Earthquake*, Seismological Press, Beijing, China, 263pp., 1986 (in Chinese).
- 8) Research Group of Estimating Losses from Future Earthquakes, Department of Seismic Hazard Prevention, State Seismological Bureau of China: *Estimating Losses from Earthquake Damages in China*, Seismological Press, Beijing, China, 51pp., 1990 (in Chinese).
- 9) Shiono, K., F. Krimgold, and Y. Ohta: Post-event rapid estimation of earthquake fatalities for the management of rescue activity, *Comprehensive Urban Studies*, Center for Urban Studies, Tokyo Metropolitan University, Tokyo, Japan, No. 44, pp. 61-106, 1991.
- 10) Shiono, K., F. Krimgold, and Y. Ohta: A method for the estimation of earthquake fatalities and its applicability to the global macro-zonation of human casualty risk, *Proceedings of Fourth International Conference on Seismic Zonation*, August 25-29, 1991, Stanford, California, U. S. A., Vol. III, pp. 227-284, 1991.
- 11) Shiono, K. and Y. Ohta: Enhancement of regional safety attained in reconstruction from a disaster: Case study of the 1976 Tangshan, China earthquake, *Comprehensive Urban Studies*, Tokyo Metropolitan University, Tokyo, Japan, No. 51, pp. 77-87, 1993 (in Japanese with an English abstract).
- 12) Sakai, S.: Survival modeling of victims trapped in collapsed buildings in earthquakes, *Journal of Natural Disaster Science*, Vol. 13, No. 2, pp. 69-95, 1991.

(Received June 17, 1994)

災害からの復興に学ぶ教訓 唐山地震後の地域安全性の向上について

塩野計司・村上ひとみ・岡田成幸・太田 裕

唐山地震の再来を仮定し、復興後の唐山における死者数を推定した。この結果と、唐山地震での実際の死者数を比較し、災害からの復興にともなう、被災域の安全性の変化について分析した。分析の結果、つぎの点が明らかになった。1) もっとも大きな被害を受けた地域では、安全性が著しく向上したものの、それ以外の地域では、それに比肩する安全性の向上はなく、復興後も、大きな被害ポテンシャルを擁することになった。2) もっとも大きな被害を受けた地域での安全性の向上は、鉄筋コンクリート部材を用いて建設された、復旧時の建物の耐震性に起因する。それ以外の地域での安全性の向上を阻害した原因は、被災後にも継続的に使用された、補強要素を持たない組積造建物の脆弱性にある。