

(88) WATER RETENTION DYNAMICS IN SIMULATED LANDFILL UNDER SETTLEMENT

Kandula.P.K.Jayakody^{1*}, Takayuki Shimaoka¹, Teppei Komiya¹

¹Department of Urban and Environmental Engineering, Kyushu University.
(744 Motooka, Nishi-ku, Fukuoka 819-0395, Japan)

* E-mail: jayakody@doc.kyushu-u.ac.jp

To examine how water retention dynamics in a landfill environment change as a result of solid waste settlement and to derive the evolution of pore size distribution, lab scale long column experiment was carried out at two different times while keeping all the other characteristics are constant. Two columns, Column 1 and Column 2, were used in the study. The log normal distribution model was applied to model the experiment data. Column 1 was used to obtain the water retention curve at time 0 day and Column 2 at time 180 day. During the experiment period, landfill settlement was mainly in the primary settlement stage. The results have shown the variation of the water retention characteristics under settlement and emphasized that these changes have to be considered in unsaturated leachate flow modeling. Pore size distribution was obtained by assuming that the capillary theory is applicable in landfill environment. However, water retention and pore size distribution must be explained by considering absorptive properties of waste particles, level of compaction and age of the waste.

Key Words: *municipal solid waste, landfill, settlement, water retention curve, pore size distribution*

1. INTRODUCTION

Solid waste landfill is still considered as main waste disposal option in many countries across the world. However, the waste composition, infiltrated amount of water into landfill, oxygen concentration in landfill, temperature and recirculation of leachate influence the landfill processes especially the biodegradation. Sustainable landfill management methods will mainly depend on that how biodegradation affect on landfill settlement, landfill pollution and recovery of utilizable materials which include the residual derived fuel (RDF) and the compost. In this study, landfill settlement has identified as two stages, namely primary and secondary. The primary stage of settlement is mainly due to compression of new pore space which has occurred due to the removal of leachate from waste matrix with self weight. The secondary stage of settlement is mainly due to the reduction of pore space with the combined effect of biodegradation and self weight compression.

Regardless of landfill type, pore structure of the landfill matrix governs leachate transport, gas

transport, heat transport and also landfill settlement. However, successful attempts to model the landfill system have been constrained by the lack of understanding of the nature of moisture retention and pore size distribution in landfill. Thus knowledge of water retention dynamics and pore size distribution is necessary to understand the transient nature of gas phase, liquid phase and solid phase in the landfill and eventually for developing an accurate model to predict the landfill processes.

Therefore the first aim of this paper is to present a method for obtaining water retention curve. The second aim is to present the evolution of the pore size distribution on the basis of water retention curve.

2. WATER RETENTION CHARACTERISTICS

Water retention is a basic hydro physical characteristic of soil. Despite the soil, water retention and leachate generation capacity in landfill depend on absorptive capacity of waste particles. The absorptive capacity is a function of physical

properties of solid waste particles such as waste composition, density, porosity and landfill age¹⁾. Many models describing the water retention characteristics in soil have been published^{2,3,4,5)} and these models can be identified as empirical curve fitting models and physical fundamentals based models. The water retention curve has the vital information on deriving the unsaturated hydraulic conductivity, shear strength and volume change⁶⁾.

3. EXPERIMENTAL MATERIALS AND METHODS

3.1 Waste characteristics and experiment setup

In order to obtain the water retention curve for simulated landfilled solid waste, municipal solid waste collected from different sources was shredded and filled into two plexyglass columns (Column 1, Column 2). The waste was filled manually and softly compacted by hand without using any external load. The used solid waste was identified as easily biodegradables (EB) which is mainly comprised of kitchen waste (vegetable, fish, meat, rice and other food waste), slowly biodegradables (SB) which is comprised of paper (office paper, news papers) and cardboards, hardly biodegradables (HB) which is comprised of plastics (high density and low density plastics). The columns were made up of small cylindrical units (See Fig. 1), which allow to separate the column into small units when analyzing the water content. Table 1 shows the initial characteristics of two columns. The only difference between the two columns is the operational time.

3.2 Procedure to obtain water retention curve

After filling the waste into Column 1 and Column 2, these were allowed to drain out leachate for about 24h. Then the water was supplied to the waste matrix of Column 1 for about 48h by connecting the bottom leachate outlet pipe of the column to a Mariotte's tank. The Mariotte's tank is used to supply the water at a constant pressure head. Saturation was conducted gradually by changing the hydraulic head to ensure the complete saturation. After achieving the complete saturation, the column was disconnected from the Mariotte's tank and bottom outlet pipe was closed. Then it was placed in a water bath and water level of the water bath was maintained to keep the saturation level up to the first two small cylindrical units from the bottom. The evaporation from the top of the column was also prevented by using wet cotton. And then the gravity drainage was allowed by opening the bottom outlet pipe until the moisture content reached the field capacity. The time period required for gravity drainage was about 6-8 weeks.

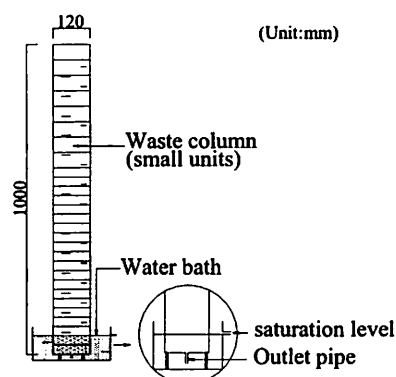


Fig. 1 Schematic diagram of the experimental column.

Table 1 Initial characteristics of the experimental columns.

Column No.	1	2
Composition (%)	70 EB 18 SB 12 HB	70 EB 18 SB 12 HB
Height of waste column (m)	0.86	0.86
Initial Density (t-wet/m ³)	0.882	0.882
Water added (ml/week)	0	300
Operation time (days)	0	180

*EB: Easily Biodegradables, SB: Slowly Biodegradables, HB: Hardly Biodegradables

Field capacity is defined as the amount of water can be retained in waste matrix against the gravity. After the gravity drainage, gravimetric moisture content was measured for the waste in each small cylindrical unit and volumetric water content was calculated.

The Column 2 was operated as a flushing type landfill by adding 300 ml of water once a week. However the water was supplied at a slow rate by ensuring equal water distribution onto the surface. The water supply was started after 24h from the filling. Leachate quality, generation and solid waste settlement were recorded. Total settled solid waste volume was obtained by multiplying the settlement and surface area of the column.

4. GOVERNING EQUATIONS

Water retention curves obtained from the experiment were fitted by Kosugi's unimodal lognormal distribution model⁵⁾.

$$\theta = \theta_r + (\theta_s - \theta_r)Q \left[\frac{\ln(\psi/\psi_m)}{\sigma} \right] \quad (1)$$

Where θ is the waste-moisture content (m^3/m^3), ratio of volume of water to the total waste volume), θ_s is saturated water content (m^3/m^3), θ_r are the residual water content (m^3/m^3), Q is the complementary cumulative normal distribution function, ψ matric suction head (m), ψ_m and σ are fitting parameters.

Complementary cumulative normal distribution function is defined as;

$$Q(x) = \int_x^\infty \frac{1}{\sqrt{2\pi}} \exp\left(-\frac{x^2}{2}\right) dx \quad (2)$$

Pore radius distribution function $f(r)$ was derived on the basis of capillary theory and equation (1) ⁷.

$$f(r) = \frac{(\theta_s - \theta_r)}{\sigma r \sqrt{2\pi}} \exp\left\{-\frac{[\ln(r/r_m)]^2}{2\sigma^2}\right\} \quad (3)$$

Where $f(1/m)$ is the frequency of a certain pore radius $r(m)$, r_m (m) is the relevant pore radius of the suction head at the effective saturation equal to 0.5. Effective saturation (S_e) is defined as;

$$S_e = \frac{(\theta - \theta_r)}{(\theta_s - \theta_r)} \quad (4)$$

5. RESULTS AND DISCUSSION

5.1 Solid waste settlement

Column 2 was operated as a flushing type simulated landfill for a period of 180 days. All other conditions were similar to the Column 1 (operation time is 0 day). As the experiment was conducted during the winter season, level of biodegradation was very low and there was not considerable gas generation. Thus the solid waste settlement was mainly in the primary settlement stage. Observed settlement percentage in Column 2 was 48%. The cumulative settlement variation is shown in the Fig. 2.

Fig.3 depicts the comparison between settled volume and net leachate discharge volume in Column 2. Net leachate discharge was estimated by deducting the amount of added water from the total volume of generated leachate. Almost 97% of total settled solid waste volume is caused by leachate discharge from the waste matrix. Water phase in the landfill exists in four sub phases; namely capillary water, gravitational water, hygroscopic water and w-

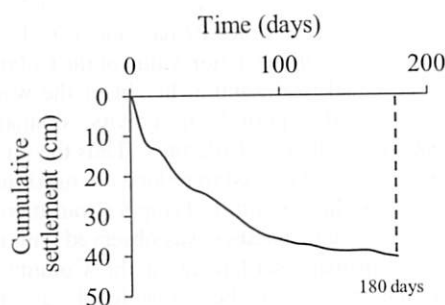


Fig. 2 Cumulative settlement variation in Column 2.

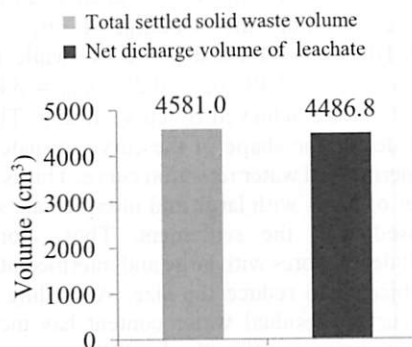


Fig. 3 Comparison of the settled solid waste volume and net leachate discharge volume in Column 2.

ater inside the waste particles⁸). In here the hygroscopic water refers the water film adhered to the surface of waste particles and the water inside the particles is defined as the cell plasma water. The result affirms that the contribution of water dissipation from the sub phases, especially from water inside the waste particles is the main factor in the primary stage of settlement.

However the level of contribution depends on the initial moisture content, waste composition, placement density, leachate salinity, type of landfill operation etc. The volume difference between the settled volume and the net discharge volume of leachate could be resulted due to the escape of entrapped gas phase and or restructuring of the solid waste matrix.

5.2 Water retention curve

Water retention curve is a non linear relationship between volumetric water content and the suction head. Fig. 4 shows the observed water retention

curves and fitted curves for the simulated landfilled waste at two different times (0 day and 180 days). Although, the maximum suction value of the Column 1 should be equal to the initial height of the waste matrix, during the period of gravity drainage, settlement had resulted in Column 1. Thus the effect of the settlement had caused to reduce the maximum suction value of the Column 1. Temporal variation in water retention characteristics was observed with the influence of primary settlement in the Column 2. This settlement could be considered as the compression due to self weight without external stress. The fitted water retention curves by using non linear least square optimization procedure shows the small decrease of saturated water content. The θ_s , θ_r , ψ_m and σ were allowed to change during the optimization. For the Column 1, $\theta_s = 0.49$, $\theta_r = 0.10$, $\psi_m = 61.1$ and $\sigma = 0.14$, while for the Column 2, $\theta_s = 0.48$, $\theta_r = 0.27$, $\psi_m = 34.8$ and $\sigma = 0.02$ were achieved by curve fitting. The ψ_m and σ decide the shape of the curve to match with the experimental water retention curve. This is to say, number of pores with large and intermediate sizes is decreased with the settlement. Thus, along the landfill depth, pores with large and intermediate sizes are subjected to reduce the size. According to the fitted curves, residual water content has increased with time by suggesting the landfill pore structural development. In the secondary settlement stage, where microbiological degradation could be predominant, the behavior of water retention curve could differ from the primary settlement stage. In the primary settlement stage, solid waste particles have not been reduced to small particles like in the secondary settlement stage. Rearrangement of solid waste particles and changes in absorptive capacity with time cause to increase the hygroscopic water phase which shows as an increase in residual water content.

5.3 Evolution of the pore size distribution

Landfill is a porous medium which consists of series of inter connected pores. These are randomly distributed between the maximum and minimum value. Capillary and statistical theories are used to derive the pore size distribution (PSD) from the water retention curve⁵⁾. In this study, the equation 3 is used to derive the PSD. Fig 5 shows the derived PSD at two different times. The parameters obtained from the fitted water retention curve were used for deriving the PSD for a wide suction range and also values beyond the experimental range. The applied suction range for deriving the PSD was within the range of pF 0 to pF 4. The mode of the pore radius distribution has a little increment with time. This might be caused by worm burrows⁹⁾ or uneven shrinkage of solid waste particles.

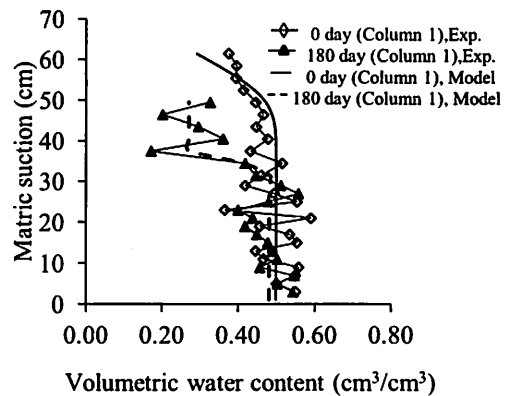


Fig. 4 Temporal dynamics in water retention curve in simulated landfill.

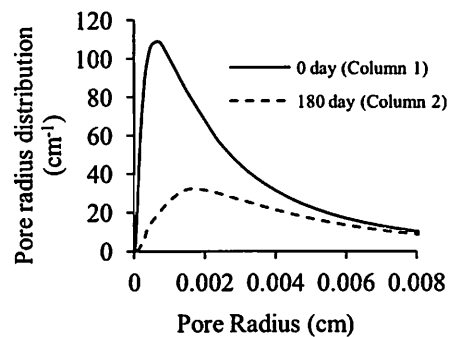


Fig. 5 Derived pore size distribution of simulated landfill.

Especially the larval stages and pupa of some insects like flies live in waste layers and make burrows. The results show that the effective pore volume ($\theta_s - \theta_r$) decreased during the primary stage of landfill settlement. This is mainly due to increased residual pore storage.

6. CONCLUSIONS AND FUTURE PERSPECTIVES

This study was conducted to characterize and compare the influence of primary stage of landfill settlement on the water retention in landfill and to derive the pore size distribution from the water retention curve. The primary stage of settlement was mainly occurred due to the physical changes in the waste matrix. However microbial biodegradation of solid waste is the governing process of secondary

stage of settlement. The water retention characteristic has varied from landfilled waste in primary stage of settlement compared to the initial stage (day 0). As log normal water retention model is based on capillary theory, it has a strong relationship to pore size distribution. However, the challenges and shortcomings which arise with the changes in absorptive properties of the solid waste with time must be incorporated in the explanation of water retention and pore size distribution. And also the influence of non capillary pores has to be considered.

Although, there was no or very low level of biodegradation in experimental columns, the microbial decomposition produces particles with different sizes and different characteristics. Hence author's intention is that microbiological degradation of solid waste creates secondary particles (humus like materials) and consequently secondary pore system which will cause to change the water retention characteristics compared to water retention characteristics of the primary stage of settlement. Therefore further studies should be carried out to verify the water retention behavior and pore size distribution in microbiologically decomposed solid waste.

Our future work is to develop pore size evolution model for the municipal solid waste landfill by considering the changes in absorptive properties of waste, different compaction levels and different biodegradation levels. The results will be used to model the unsaturated leachate transport in landfill and to develop a new landfill settlement model.

ACKNOWLEDGMENT: Authors are grateful to Research Institute for East Asia Environments, Kyushu University, Japan.

REFERENCES

- 1) El-Fadel M., Findikakis A.N. and Leckie J.O. : Modeling leachate generation and transport in solid waste landfills, *Environmental technology*, Vol.18, pp.669-686,1997.
- 2) Brooks, R. and Corey, A. : Hydraulic properties of porous media, Hydrology Paper No. 3. Colorado State University, Fort Collins, CO,1964.
- 3) Van Genuchten, M.T. A closed form equation for predicting the hydraulic conductivity of unsaturated soils, *Soil Sci.Soc Of Am.J.*, Vol.44, pp.892-898,1980.
- 4) Fredlund, D.G. and Xing, A. : Equations for the soil water characteristic curve, *Canadian Geotechnical Journal*, Vol. 31, pp.521-532, 1994.
- 5) Kosugi, K. : The parameter lognormal distribution model for soil water retention, *Water Resource Research*, Vol. 30, pp.891-901,1994.
- 6) Sillers S.W., Fredlund D.G. and Zakerzadeh, N.: Mathematical attributes of some water characteristics curve models, *Geotechnical and geological engineering*, Vol.19, pp.243-283,2001.
- 7) Kosugi, K. : Lognormal distribution model for unsaturated soil hydraulic properties, *Water Resource Research*, Vol. 32, pp.2697-2703,1996.
- 8) Jayakody K.P.K., Shimaoka T. and Teppei K. : Applicability of existing landfill settlement models to different waste compositions, Proc. of 8th expert meeting on solid waste management in Asia and Pacific Islands, pp.218-227,2011.
- 9) D'Haene K., Vermang J., Cornelis W.M., Leory B.L.M., Schiettecatte W., De Neve S., Gabriels D. and Hofman G. : Reduced tillage effects on physical properties of silt loam soils growing root crops, *Soil and Tillage Research*, Vol. 99, pp.279-290,2008.

(Received May 30, 2011)