

# DETECTION OF LANDSLIDES AND BUILDING DAMAGE CAUSED BY EL SALVADOR EARTHQUAKE OF JANUARY 13, 2001 USING LANDSAT 7 SATELLITE IMAGES

Miguel ESTRADA<sup>1</sup>, Masayuki KOHIYAMA<sup>2</sup>, Masashi MATSUOKA<sup>3</sup>, and Fumio YAMAZAKI<sup>4</sup>

<sup>1</sup> Student Member of JSCE, Graduate Student, Institute of Industrial Science, The University of Tokyo  
(4-6-1 Komaba, Meguro-ku, Tokyo 153-8505, JAPAN)

<sup>2</sup> Research Associate, Institute of Industrial Science, The University of Tokyo  
(4-6-1 Komaba, Meguro-ku, Tokyo 153-8505, JAPAN)

<sup>3</sup> Chief Research Engineer, Earthquake Disaster Mitigation Research Center, NIED  
(2465-1 Mikiyama Fukui Miki, Hyogo 673-0433, JAPAN)

<sup>4</sup> Member of JSCE, Dr. Eng., Assoc. Professor, Institute of Industrial Science, The University of Tokyo  
(4-6-1 Komaba, Meguro-ku, Tokyo 153-8505, Japan)

A strong earthquake hit El Salvador on January 13, 2001. The earthquake with a magnitude of 7.6 caused huge damage in the urbanized areas as well as numerous landslides. In case of these types of earthquake, the identification of hard hit areas is important and necessary information for decision-makers to handle the disaster relief process. In this study, remote sensing images taken before and after the earthquake by Landsat 7 (ETM+) satellite are compared to identify the location of landslides and hard hit urban areas. The proposed method uses the rationing between bands in the visible range as well as the sharpening of the multi-spectral bands by merging with the panchromatic band. It is expected that with the help of this additional band the identification of landslides and damaged areas will be improved.

**Key words:** Remote sensing, landslide, building damage, the 2001 El Salvador Earthquake.

## 1. INTRODUCTION

Recently remote sensing satellite images have become a tool for damage detection. Thanks to their capacity of covering large area of land the temporal changes that natural events, i.e. earthquakes, floods, landslides, etc., cause can be monitored. This information is vital for decision-makers to understand the magnitude of damage and thus to conduct the response/recovery activities.

In order to identify the location of landslides, pre- and post-event sharpened images of Landsat-7 are visually compared. The sharpness is obtained by merging the first three visible bands of 30m pixel-resolution with the eighth band, the panchromatic band, of 15m pixel-resolution. As a result an RGB image of 15m pixel-resolution is obtained. The detection of heavily damaged areas has been carried out by comparison and rationing between different bands in the visible range.<sup>1)</sup>

## 2. THE JANUARY 13, 2001 EL SALVADOR EARTHQUAKE

On January 13, 2001 at 11:33 am (local time) a strong earthquake with a magnitude  $M_w=7.6$  hit the Republic of El Salvador. It was a subduction zone earthquake off the coast of El Salvador. According to USGS the epicenter was located at 12.83°N and 88.79°W about 110 km south-southeast of San Salvador city (Figure 1). The earthquake was also felt in Mexico, Guatemala, Honduras and Nicaragua. Officially the toll of the earthquake was 944 deaths and 5,565 injured people, and 1,155 public buildings and 169,692 dwellings were damaged while 108,261 dwellings were destroyed and there were 445 landslides that buried 688 houses.<sup>2)</sup> The main types of heavily affected structures by the earthquake were adobe and bajareque dwellings; bajareque is formed by walls of cane and mud, while engineered structures performed very well.

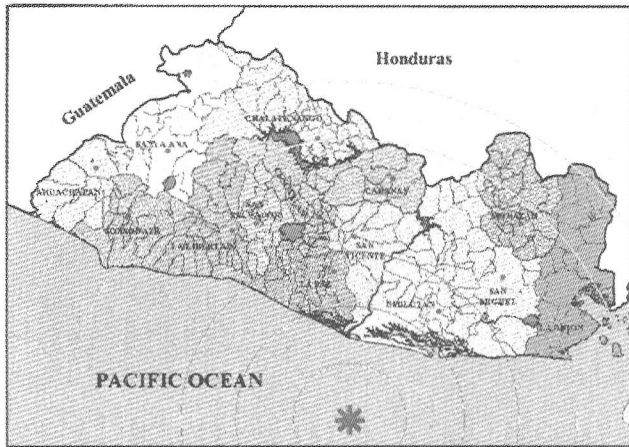


Fig. 1. Map of the Republic of El Salvador and the location of the epicenter.

### 3. DATA

The data used in this study are remotely sensed images taken before and after the earthquake. The pre-event image was taken on November 15, 2000 and the post-event image was taken on February 19, 2001 (Figure 2). The images were acquired by Landsat 7 satellite, which carries the Enhanced Thematic Mapper Plus (ETM+) sensor. This satellite is operated since April 1999. Unlike the previous Landsat missions, this satellite carries an additional panchromatic band of 15 m resolution and the thermal band with 60 m resolution. The image covers an area of 183 km x 170 km, the satellite has a repeat interval of 16 days and its Altitude is 699 km. Characteristics of the ETM+ sensor are summarized in Table 1.<sup>3)</sup>

Table 1. Characteristics of the Landsat 7 satellite

Band Number	Spectral Range ( $\mu\text{m}$ )	Ground Resolution (m)
1	0.450 to 0.515	30
2	0.525 to 0.605	30
3	0.630 to 0.690	30
4	0.750 to 0.900	30
5	1.550 to 1.750	30
6	10.40 to 12.50	60
7	2.090 to 2.350	30
8 (Panchromatic)	0.520 to 0.900	15

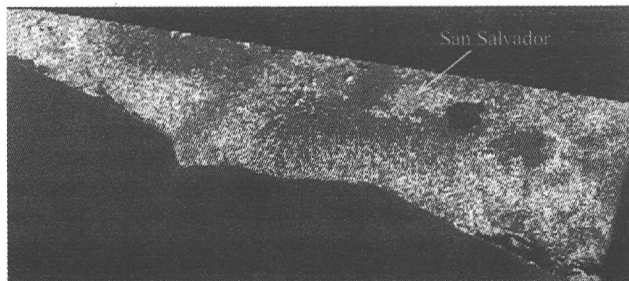


Fig. 2. Post event image (RGB 752) of Landsat 7

### 4. IMAGE ENHANCEMENT

Colors are formed by the combination of different amounts of red, green and blue lights. Figure 3(a) shows a geometrical representation of the RGB model color cube. The origin of this cube is black and the coordinates are given for values over the axes red, green and blue. Notice that white light is formed by the addition of maximum red, green and blue. The HSI model uses the concepts of hue (H), saturation (S) and intensity (I) to explain the idea of color. Hue refers to the dominant or average wavelength of light contributing to a color. Saturation specifies the purity of color relative to gray. Intensity relates to the total brightness of color. Figure 3(b) shows a 3D geometrical representation (hexcone) of the HSI model. Hue is represented by angular position around the top of the hexcone (e.g. red at 0°, Green at 120°, and blue at 240°). Saturation is given by the distance from the center, vertical axis of the hexcone. Intensity is defined by the distance along the gray line, from black to any given hexagonal projection. Any pixel in the RGB color space can be transformed into its HSI counterpart and vice versa.

The hue, saturation and intensity transform is useful in two ways: (i) as a method of image enhancement and (ii) as a means of combining co-registered images from different resolution or sources. Figure 4 illustrates this process. First RGB bands (i.e. Bands 3, 2 and 1) are converted into HIS; this process is called Encode. Afterwards, the spatial resolution is changed to match the image with high resolution and the intensity component is replaced by the high-resolution data. In case of Landsat 7 the high resolution band is Band 8; this process is called Manipulate. Finally, this new H', S', I' is converted back to R', G', B'; this process is called Decode.<sup>4)</sup>

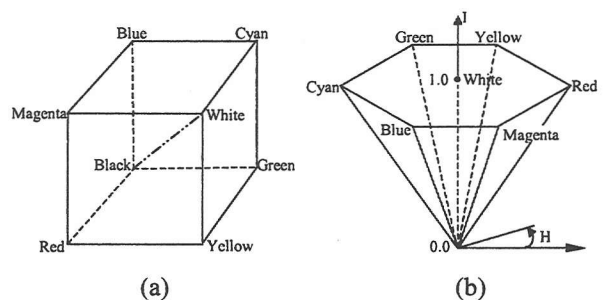


Fig. 3. The color space. (a) Red-green-blue color cube. (b) Hue-saturation-intensity hexcone.

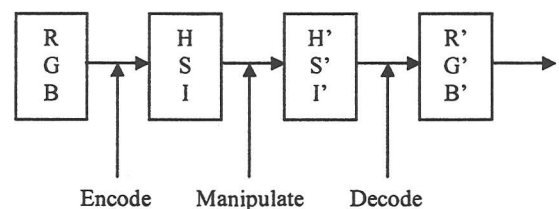


Fig. 4. RGB/HSI encoding and decoding for image enhancement.

### (1) RGB to HSI transformation:<sup>5)</sup>

First the RGB values have to be normalized by their maximum values, so that the range of RGB is [0, 1]. The ranges of S and I are also [0, 1] and the range of H is [0, 2 $\pi$ ].

$$I = \max(R, G, B)$$

If  $I=0$ ; then  $S=0$  and  $H=\text{indeterminate}$

If  $I \neq 0$ , Let  $i = \min(R, G, B)$   
 Then  $S = (I-i)/I$   
 Let  $r = (I-R)/(I-i)$ ,  $g = (I-G)/(I-i)$ ,  $b = (I-B)/(I-i)$   
 Then: if  $R=I$  then  $H = (g-b)\pi/3$   
 if  $G=I$  then  $H = (2+r-b)\pi/3$   
 if  $B=I$  then  $H = (4+g-r)\pi/3$

### (2) HSI to RGB transformation:

Once the image has been manipulated, it must be transformed back into the RGB so that the image can be displayed. The transformation from HSI to RGB is as follows:

If  $S=0$ ,  $R=G=B=I$  regardless of value of  $H$

If  $I \neq 0$ , let:  $H' = 3H/\pi$ ,  $h = \text{floor}(H')$ ,  $P = I(1-S)$ ,  
 $Q = I\{1-S(H'-h)\}$  and  $T = I\{1-S(1-H'+h)\}$   
 (floor(x): function of getting the truncated value of x)

Then:

If  $h=0$  then:  $R=I$ ,  $G=T$ ,  $B=P$   
 If  $h=1$  then:  $R=Q$ ,  $G=I$ ,  $B=P$   
 If  $h=2$  then:  $R=P$ ,  $G=I$ ,  $B=T$   
 If  $h=3$  then:  $R=P$ ,  $G=Q$ ,  $B=I$   
 If  $h=4$  then:  $R=T$ ,  $G=P$ ,  $B=I$   
 If  $h=5$  then:  $R=I$ ,  $G=P$ ,  $B=Q$

Figure 5 shows an example of this image enhancement.

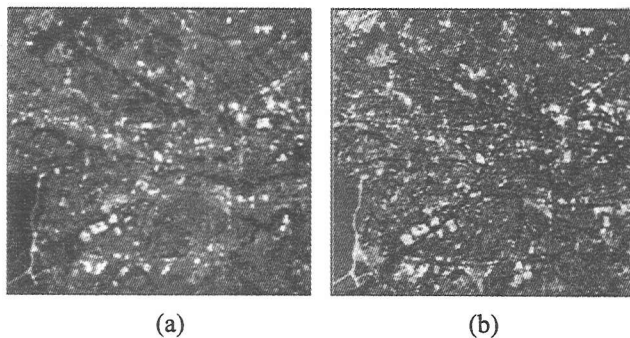


Fig. 5. San Salvador city. (a) RGB (321) composite color image. (b) Sharpened image by HSI transformation and merged with the panchromatic band.

## 5. LANDSLIDE DETECTION

Once the pre- and post-images have been enhanced they are compared to identify the location of major landslides. To carry out the visual comparison, the two images are linked

to each other, so that visualization area is the same. Afterwards their histograms are matched so that we obtain an apparent distribution of the brightness values in certain range and make the brightness distribution of the two images as close as possible. As a result we achieve two images in which the differences due to landslide are highlighted. Figure 6 (a) and (b) show the pre- and post-event enhanced images via HSI method for one of the major landslides detected.

### (1) Lost Estimation

Geographic Information Systems (GIS) are computer-based systems that can deal with virtually any type of information about features that are referenced by the geographical location. Overlaying a GIS map over a satellite image, we can combine the information kept in the GIS with the visual information given by the remotely sensed image and conduct queries about extension of damage, number of deaths, economic loss, etc.

As mentioned before, a huge landslide occurred at Nueva San Salvador (Figure 6) burying around 600 houses and causing death of 585 people. By overlaying a GIS map over the satellite image (Figure 6(c)) it is possible to estimate how many blocks were buried and then looking in the database kept in the GIS system give some numbers about how many houses were buried, how many people might be die and so on. Notice in Figure 6(b), there is a white spot at the toe of the landslide. This very high reflection area is due to the spreading of lime over the buried houses to avoid any outbreak of infection. It is also can be observed in the picture shown in Figure 7.

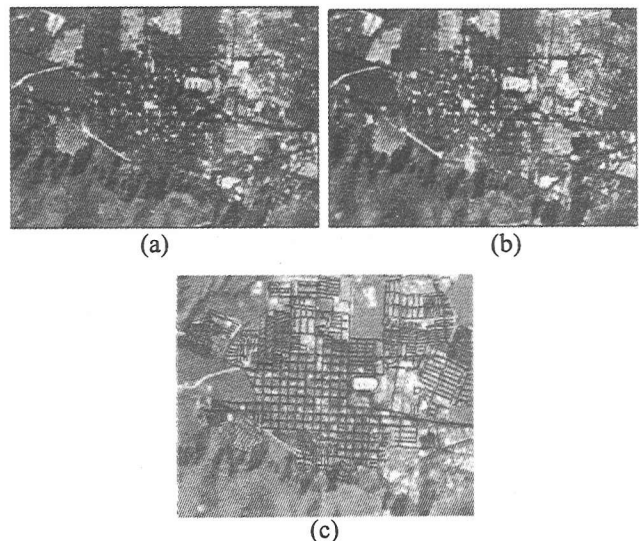


Fig. 6. Enhanced image of Nueva San Salvador. (a) Enhanced pre-event image. (b) Enhanced post-image and location of the landslide. (c) GIS map overlaid on the satellite-enhanced image.

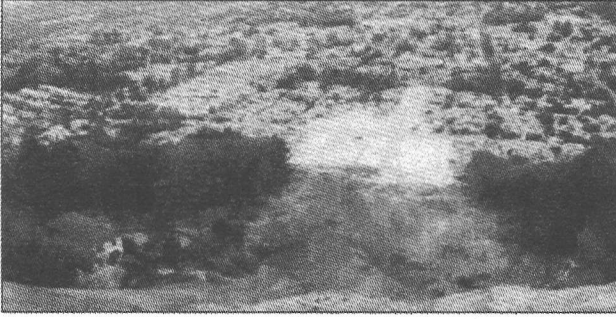


Fig. 7. Picture of the landslide in Nueva San Salvador (Santa Tecla City). Photographed by Jörgen Johansson of IIS, the University of Tokyo.

## 6. BUILDING DAMAGE DETECTION

As a method for building damage detection, we conducted the comparison of the data in the visible range. For Landsat, Band 1, Band 2 and Band 3 are within this range. First we calculate the average of these three bands by

$$BR_{avg}(i, j) = \sum_{k=1}^3 BB_k(i, j) / 3 \quad (1)$$

where  $BB_k(i, j)$  is the digital number of the pixel  $(i, j)$  of the band  $k$  of the pre-event image.  $BR_{avg}(i, j)$  is the averaged value of the pixel  $(i, j)$  of the pre-event image. This same formula is also applied to the post-event image. Then, we calculate the ratio between these two averaged images by Equation 2, where  $AR$  represents the averaged image after the event and  $R$  the ratio:

$$R(i, j) = AR_{avg}(i, j) / BR_{avg}(i, j) \quad (2)$$

Figure 9 shows the image obtained from this equation. As a result we obtain a ratio image that is shown in Figure 8.

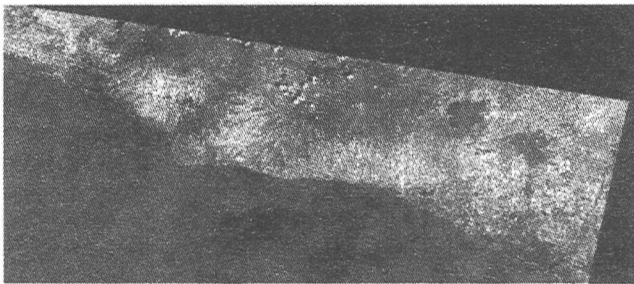


Fig. 8. Ratio after/before of the average of the first three visible bands.

Afterwards, we analyze the values of the modified digital number in this new image for the different levels of damage, to get any typical distribution and we obtain the graph shown in Figure 9. As we can observe the cumulative probability lines that represent the different levels of damage: Heavy, Medium and Minor, are so close. Due to

this proximity between those lines, unfortunately, the identification of different level of damages is very difficult.

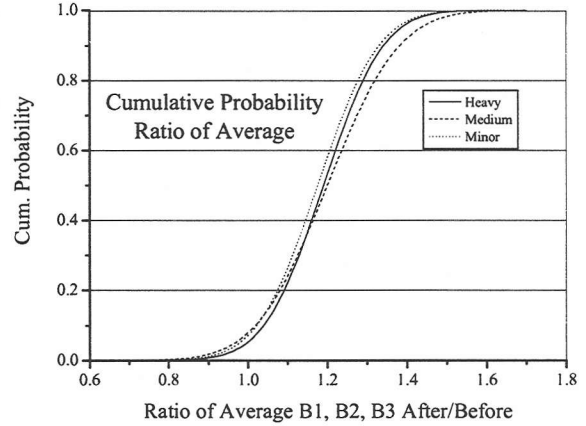


Fig. 9. Cumulative probability of the ratio after/before of the averaged images.

## 7. CONCLUSIONS

Detection of damage due to the January 13, 2001 El Salvador Earthquake has been conducted using satellite images by Landsat-7. The major landslides were successfully identified by comparing enhanced pre- and post-event images. The enhanced method used in this study is the HSI (hue, saturation and intensity) transformation and merging with the high-resolution panchromatic band. In this study, the identification of major landslides was carried out manually; A future study will aim to automate this process.

The identification of different levels of damage through the comparison of the pre- and post-event images in the visible range was not satisfactory. A future research on different methods of identification is also necessary

## ACKNOWLEDGEMENTS

The Landsat images, which are owned by US Government, were provided by USGS and NASDA.

## REFERENCES

- 1) Estrada, M., Matsuoka, M., and Yamazaki F. Use Of Landsat Images For The Identification Of Damage Due To The 1999 Kocaeli, Turkey Earthquake. *Proceedings of the 21<sup>st</sup> Asian Conference on Remote Sensing*, Vol. 2, pp. 1185-1190, 2000.
- 2) Comité de Emergencia Nacional de El Salvador. Crónicas de desastres. <http://www.coen.gob.sv/>, 2001.
- 3) NASA, Landsat 7, Science Data Users Handbook, <http://landsat7.usgs.gov/>, 2001.
- 4) Lillesand, T. and Kiefer R. *Remote Sensing and Image Interpretation*, 4<sup>th</sup> ed., John Wiley & Sons, Inc., New York, 2000.
- 5) Japan Association on Remote Sensing. *Remote Sensing Note*, 2<sup>nd</sup> ed., IIS, The University of Tokyo, Tokyo, 1996.